




**Top View**

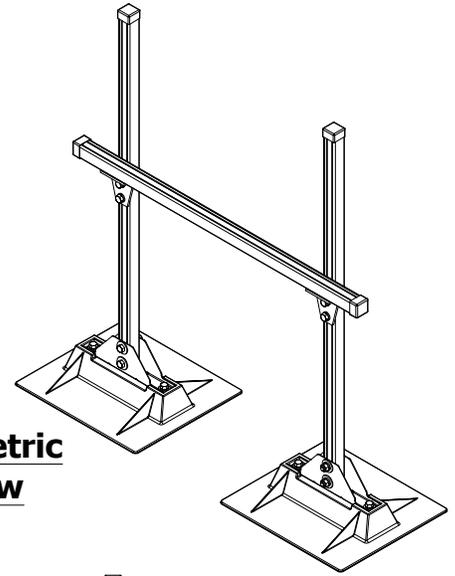

**Isometric View**

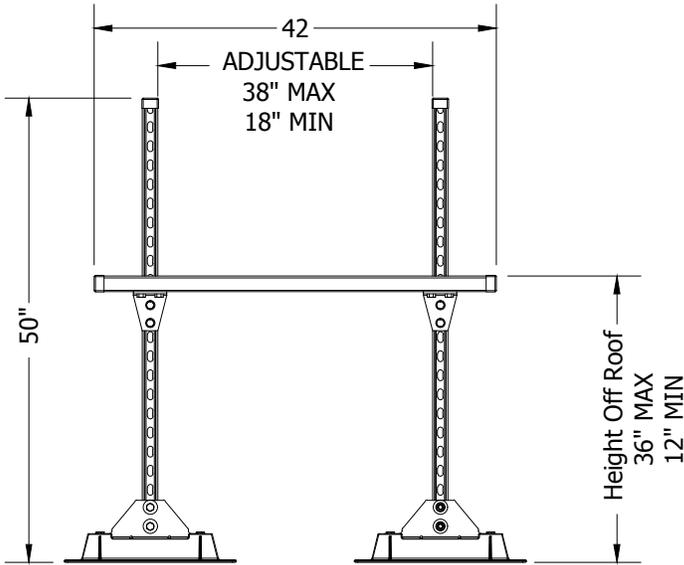

**Front View**

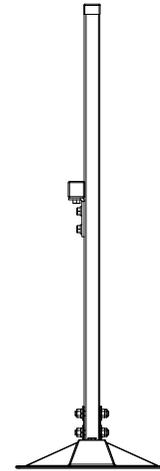

**Side View**

**PRODUCT DESCRIPTION**

A frame used to support duct or various utilities on flat roofs. Unique design allows a sturdy support without penetrating or causing damage to the roof membrane. The 8-DSA model is manufactured with 12 gauge 1-5/8"x1-5/8" slotted strut for maximum adjustability in length and height. The duct or "H" type adjustable support base is made of hot-dip galvanized strut and hardware with polycarbonate plastic bases.

**KEY INFORMATION**

- Recommended spacing is not to exceed 8 foot centers
- Frame is made with 12 ga. slotted strut
- Base Material: Polycarbonate
- All metal parts are hot-dip galvanized
- 2 year limited warranty

**ACCESSORIES**

- 16x18 Support Pad
- Cross bracing

**LOADING**

Allowable loading to the support per the table below. Rooftop Sleeper Support, Inc. is not responsible for damage caused by improperly installed or overloaded supports.

8-DSA LOAD TABLE		
SPAN (in)	ALLOWABLE UNIFORM DISTRIBUTED LOAD (lbs/ft)	ALLOWABLE CONCENTRATED LOAD AT CENTER (lbs)
18	513	573
20	462	516
22	420	469
24	385	430
26	355	397
28	315	369
30	275	344
32	241	323
34	214	304
36	191	287
38	171	272