DRAWING NUMBER

VOID DATA

USE OF SUPERSEDED OR '

WE CAN ASSUME NO RESPONSIBILITY 12-9-82

NOTICE

AND CHANGE WITHOUT

TOLERANCE

SUBJECT TO MANUFACTURERS

4

NONE

SCALE:

APPROVED 6

СНЕСКЕВ ВҮ: **ТВ** 

DRAWN BY:

4430, 4431




LOCATION

# **CAULK FERRULE CLEANOUTS** WITH FRAME AND COVER

## LEAD SEAL PLUG WITH SQUARE FRAME AND COVER

FUNCTION: Used in hub openings in drainage piping where a cleanout is required. The straight thread lead seal plug permits quick and easy removal. Grooves on outside of ferrule prevent turning. Type of cover as indicated by figure number selected. Both covers are used to cover cleanouts concealed in walls. The square design is particularly adaptable to adjacent walls, floors, ceilings, etc., that are finished of material in straight line patterns. The anchoring lugs provide easy means for securing the frame to the wall construction. The face-of-wall (4430) cover is for tile, masonry, or dry wall construction, and is usually installed on an opening provided in the finished wall. The flush-with-wall (4431) cover is for plaster or wet wall construction and is installed during the wall construction.

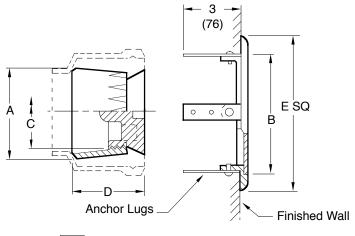

Adjustable 2 1/2 (64) MAX F SQ B C Finished Anchor Lugs Wall

FIG. 4430C . . . . FACE-OF-WALL COVER

FIG. 4431C . . . . FLUSH-WITH-WALL COVER

| Α        | В                     | С           | D          | E            | F            |
|----------|-----------------------|-------------|------------|--------------|--------------|
| SIZE     | OPENING               | SIZE        |            | SQ           | SQ           |
| 02 (50)  | 6 x 6 (150) x (150)   | 1 1/2 (38)  | 2 1/2 (64) | 7 3/4 (195)  | 6 1/2 (165)  |
| 03 (80)  | 6 x 6 (150) x (150)   | 2 1/2 (64)  | 2 3/4 (70) | 7 3/4 (195)  | 6 1/2 (165)  |
| 04 (100) | 6 x 6 (150) x (150)   | 3 1/2 (89)  | 3 (76)     | 7 3/4 (195)  | 6 1/2 (165)  |
| 05 (125) | 8 x 8 (205) x (205)   | 4 1/2 (115) | 3 (76)     | 9 3/4 (250)  | 8 1/2 (215)  |
| 06 (150) | 8 x 8 (205) x (205)   | 5 1/2 (140) | 3 (76)     | 9 3/4 (250)  | 8 1/2 (215)  |
| *        | 10 x 10 (255) x (255) | -           | -          | 11 3/4 (300) | 10 1/2 (265) |
| *        | 12 x 12 (305) x (305) | -           | -          | 13 3/4 (350) | 12 1/2 (320) |
| *        | 15 x 15 (380) x (380) | -           | -          | 16 3/4 (425) | 15 1/2 (395) |

\*Covers may be used with any of the above plugs

NOTE: Dimensions shown in parentheses are in millimeters.

#### **REGULARLY FURNISHED:**

Duco Cast Iron Caulk Ferrule with Cast Iron Lead Seal Plug, with Chrome Plated Bronze Square Frame and Secured Cover. Type of Cover as Indicated by Figure Number Selected.

## **VARIATIONS:**

"T" Handle Plug -TH Plug Tapped 1/4"(6) -20 Thread Vandal Proof Screws-U

### **OPTIONAL MATERIALS:**

Cast Bronze Body -BB Cast Bronze Plug -BP Nickel Bronze Frame with Stainless Steel Cover -NB

Polished Bronze Frame and Cover -PB

| G F E D | 10-7-14<br>7-15-13<br>8-11-97<br>1-11-96 |  |  |
|---------|--|--|--|
| REV.    | DATE                                     |  |  |

Revised Variations Rev. Table Chg'd Var. & Opt. Mat. Added Millimeters DESCRIPTION TRW BW CĽ TBW **EMB** BS BY CKD. BY

WEIGHT POUNDS

VOLUME CUBIC FEET

FIGURE NUMBER

4430, 4431