

# **CONTEMPORARY HYDRATION**

### A152-VR-BF4 Series

### **MODEL A152400S-VR-BF4**

BARRIER FREE, VANDAL-RESISTANT, BI-LEVEL, WALL MOUNTED DRINKING FOUNTAIN WITH SEMI-RECESSED SENSOR OPERATED BOTTLE FILLER AND 32" TRIM PANEL

#### STANDARD FEATURES

- Both Child Or Adult Ada Compliant (When Properly Installed)
- 18 Gauge, 304 Stainless Steel Basin And Flush Mounted Chrome Plated Brass Button
- Polished Lead-free Stainless Steel, Anti-rotation Nonsquirt Bubbler Or Flexible Low Flow Bubbler
- 100-mesh Inlet Strainer
- Mounting Frame
- 32" Wide Trim Panel
- 1.0 G.p.m. Fill Rate (Bottle Filler)
- Laminar Flow Water Supply (Bottle Filler)
- 115v Plug-in Transformer (Bottle Filler)



#### MODEL:

(Must Specify)

#### SUGGESTED SPECIFICATIONS

Model A152400S-VR-BF4 is a wall mounted, Vandal Resistant Drinking Fountain and Bottle Filler combination made from 18 gauge, 304 stainless steel with a brushed finish. Fountain shall be activated by Chrome Plated Brass Pushbutton using less than 5 pounds of force, which activates internally mounted valves with adjustable stream regulators controlling the water flow. Bottle Filler activates using an Infrared Sensor. Bubblers shall be polished stainless steel with non-squirt feature and operates on a water pressure range of 20-105 PSIG. Unit shall have uniquely designed, two-piece contoured bowls with a P-trap integral to the unit. Fountain is certified to ANSI A117.1, NSF/ANSI 61, Section 9, Public Law 111-380 (NO-LEAD), and CHSC 116875. Fixture meets ADA, ADA Standing Person, and ADA Child requirements when mounted appropriately.

FLEXIBLE BUBBLER (LOW	FLOW)
☐ A152200F-VR-BF4	Bronze

Finish ☐ A152300F-VR-BF4

Gold Finish (High Polish) Satin stainless Finish ☐ A152400F-VR-BF4

LEAD-FREE STAINLESS STEEL BUBBLER ☐ A152200S-VR-BF4 Bronze Finish

☐ A152300S-VR-BF4 Gold Finish (High Polish)

Satin stainless Finish (Shown) ☐ A152400S-VR-BF4

#### **OPTIONS**

(additional costs may be incurred)

□ -AP3 Access Panel for a Dual Fountain

☐-HP High Polished Stainless Steel Reverse Bi-Level (Bottle Filler Opposite) -RBL

☐ -SK3-18 Skirt Kit, Stainless Steel, for upper unit

☐ -WF1 1500-gallon capacity, NSF 42+53, 1 micron Lead Reduction Filter

□ -WF3 3000-gallon capacity, NSF 42+53, 1 micron Lead Reduction Filter

A9100080-A 8 GPH Remote Water Chiller (Recommended to be with 10 Feet of Fixture)
















▲ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



# **CONTEMPORARY HYDRATION**

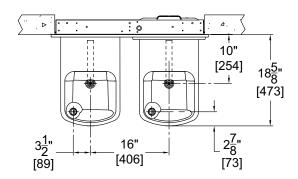


## A152-VR-BF4 Series


**MODEL A152400S-VR-BF4** 

BARRIER FREE, VANDAL-RESISTANT, BI-LEVEL, WALL MOUNTED DRINKING FOUNTAIN WITH SEMI-RECESSED SENSOR OPERATED BOTTLE FILLER AND 32" TRIM PANEL

#### **GENERAL NOTES**:

- 1. ALL DIMENSIONS ARE IN INCHES [MM]
- \*2. DIMENSIONS SHOWN ARE FOR RECOMMENDED ADULT HEIGHT. ADJUST VERTICAL DIMENSIONS AS NECESSARY TO COMPLY WITH FEDERAL, STATE, & LOCAL CODES

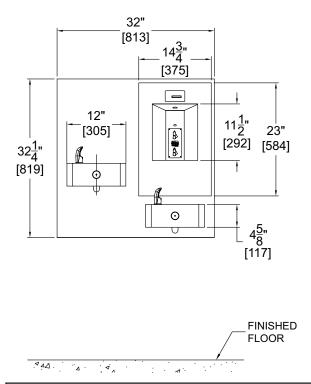

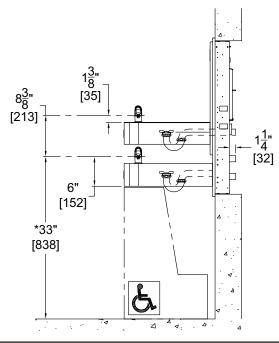

Murdock Mfg.™ warrants that its products are free from defects in material or workmanship under normal use and service for a period of one year from date of shipment. Murdock's liability under this warranty shall be discharged solely by replacement or repair of defective material, provided Murdock™ is notified in writing within one year from date of shipment, F.O.B. Industry, California.

MMARY FOR RING	Model Number & Options	_Quantity	All dimensions are subject to manufactures tolerance of plus or minus ½" nominal and subject to change without notice. Murdock
SELECTION SUMMA & APPROVAL FOR MANUFACTURING	Company		assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of
CTIC APPR INUE	Contact	_Title	optional accessories. Murdock Mfg.™ Member of Morris Group
SELE &/ M/	Signature (Approval for Manufacturing)		International™. Please visit www.murdockmfg.com for most current specifications.
	Wallactaling)	Date	current specifications.

**MURDOCK MFG.** • 15125 Proctor Avenue • City of Industry, CA 91746 USA Phone 800-453-7465 or 626-333-2543 • Fax 626-855-4860 • www.murdockmfg.com

Member of MORRIS GROUP