

Ordinary to Extraordinary Self-Leveling Technology

EH Fixed Rubber Support

EH FIXED RUBBER Support's are supports made of SBS recyclable rubber. The material used has a particularly high resistance to temperature changes, acid solutions and atmospheric agents that make it mostly suitable for outdoor use. They are subjected to great crush performance, thanks to its elastic power, it returns to its original shape. It has a high sound absorbing property and its composition is formulated specifically to match the high performance of the "white head" present in the NM and SE models belonging to the MRP Pedestal line.

EH FIXED RUBBER Support's are a fixed support that are available in two sizes - 4-3/4" (121mm) OD x 3/8' (10mm) high and 4-3/4" (121mm) OD x 1/4" (6 mm) high.


Both can be used separately or superimposed, until they reach the required height.


Because of its raw material and its compact size, **EH FIXED RUBBER Supports** become a great ally in the construction field and in architecture; ensuring high speed during installation procedures, better sound insulation and granting a good floor finishing results. It can raise any type of floor finish (stone, ceramic, cement, composite material, etc...) of any size and weight. These supports can be used whole, half or divided into guarter sections.



On request, the tabs are also available with the required thickness to be used for 1/16" (2mm) and 1/8" (3mm) joints .

** Special order

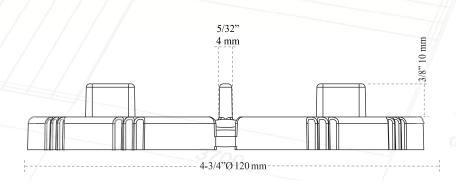







Rubber Fixed Support are also available with Locking Pins to be used with our IPE Wood Deck Tiles. Rubber Support is 5-1/4" (133mm) OD x 1/4" (6mm) tall. Tab height is 5/8" (16mm) x 5/32" (4mm) thick.

*Also available without locking pins.