

TRADITIONAL DRINKING FOUNTAINS

Special Application

MODEL M-84

POST JUG FILLER

STANDARD FEATURES

Model M-84 Post Jug Filler features design simplicity. This unit includes a single Jug filler. The Jug Filler is operated by a self closing pushbutton valve. Standard model is seasonal, not freeze resistant. Heavy-duty construction ensures durability and field-servicable components are easily accessible.



Jug Filler shall be Murdock model M-84. Unit shall be furnished with one jug filler mounted on the pedestal.

Pedestal shall fabricated of heavy duty type 304 stainless steel and base of pedestal shall have four mounting holes. Pedestal shall have a satin finish unless otherwise specified.

Jug Filler valve shall be self-closing, pushbutton operated and constructed of cast brass with a rough chrome plated finish. Supply inlet shall be lead free with 1/2" NPS hose end connection.

All solid brass castings shall conform to ASTM standards B61 and B62. Pushbutton valve conforms with lead-free requirements of NSF61, Section 9, 1997 and Federal Public Law 111-380.



MODEL: (Must Specify)

☐ - M-844 Satin stainless steel finish Green powder-coat (Shown)

☐ - M-845 ☐ - M-846 Red powder-coat

□ - M-847 Blue powder-coat

OPTIONS

(additional costs may be incurred)

- FRU1 Underground freeze-resistant valve 1

- LOGO Customer Specified logo 1

Options Notes:

¹ See separate option sheet.

Complies with the following standards: ANSI/NSF 61.9











▲ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

MURDOCK MFG. • 15125 Proctor Avenue • City of Industry, CA 91746 USA Phone 800-453-7465 or 626-333-2543 • Fax 626-855-4860 • www.murdockmfg.com

Member of MORRIS GROUP

M-84


Revised: 08/04/18




TRADITIONAL DRINKING FOUNTAINS

Special Application

MODEL M-844POST HYDRANT



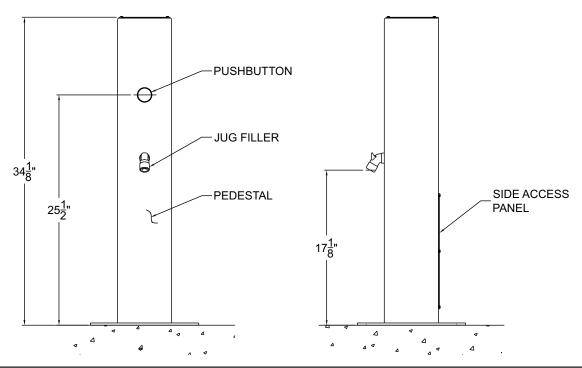

Murdock Mfg.™ warrants that its products are free from defects in material or workmanship under normal use and service for a period of one year from date of shipment. Murdock's liability under this warranty shall be discharged solely by replacement or repair of defective material, provided Murdock™ is notified in writing within one year from date of shipment, F.O.B. Industry, California.

UMMARY AL FOR TURING	Model Number & Options	_Quantity	All dimensions are subject to manufactures tolerance of plus or minus ½" nominal and subject to change without notice. Murdock
SAL	Company		assumes no responsibility for use of void or superseded data. Dimensions
ECTION SU APPROVA ANUFACTI	Contact	Title	may change with the addition of optional accessories. Murdock Mfg.™,
SELEC & AF MAN	Signature (Approval for		Member of Morris Group International™. Please visit www.murdockmfg.com for most
S	Manufacturing)	Date	current specifications.

MURDOCK MFG. • 15125 Proctor Avenue • City of Industry, CA 91746 USA Phone 800-453-7465 or 626-333-2543 • Fax 626-855-4860 • www.murdockmfg.com

Member of MORRIS GROUP

M-84 Revised: 08/04/18