S4440

VOID

DED OR

SUPERSEI 4

9

NO RESPONSIBILITY

WE CAN ASSUME

NOTICE

WITHOUT 9 ВУ

AND CHANGE

MANUFACTURERS TOLERANCE

DRAWN

4440, 4441

IGURE JUMBER

NONE FOR USE

12-15-82

APPROVED BY

LOCATION

CAULK FERRULE CLEANOUTS WITH FRAME AND COVER

TAPER THREAD PLUG WITH FRAME AND SCORIATED COVER

FUNCTION: Used in wall openings where a caulk ferrule/taper thread plug is provided for accessibility to the building waste piping. Face-of-Wall or Flush-with-Wall covers provided to conceal opening in finished wall.

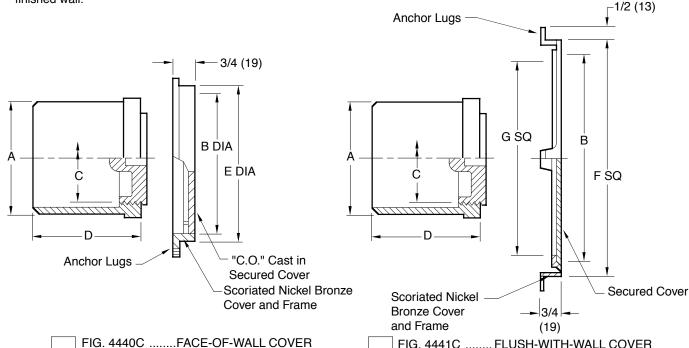


FIG. 4440CFACE-OF-WALL COVER

FIG	1///1C	FI USH-WITH-WAI I	COVER

	Α	B OPENING		С	D	E	F	G
	SIZE	DIA	SQ	SIZE		DIA	SQ	SQ
\blacktriangle	02 (50)	4 (100)	6 x 6 (150) x (150)	1 1/2 (38)	3 1/2 (89)	4 1/2 (115)	7 (180)	5 1/2 (140)
	03 (80)	5 1/2 (140)	6 x 6 (150) x (150)	2 1/2 (64)	3 3/4 (95)	5 3/4 (145)	7 (180)	5 1/2 (140)
lack	04 (100)	6 (150)	6 x 6 (150) x (150)	3 1/2 (89)	4 1/4 (110)	6 1/2 (165)	7 (180)	5 1/2 (140)
	05 (125)	6 (150)	8 x 8 (205) x (205)	4 1/2 (115)	4 1/4 (110)	6 1/2 (165)	9 (230)	7 1/2 (190)
	06 (150)	8 (205)	8 x 8 (205) x (205)	5 1/2 (140)	4 1/4 (110)	8 1/2 (215)	9 (230)	7 1/2 (190)
	08 (200)	10 (255)	10 x 10 (255) x (255)	7 1/2 (190)	4 1/2 (115)	10 1/2 (265)	11 (280)	9 1/2 (240)

▲ Sized for Service Weight and/or NO-HUB

NOTE: Dimensions shown in parentheses are in millimeters.

REGULARLY FURNISHED:

Duco Cast Iron Caulk Ferrule with Cast Bronze Taper Thread Plug and Secured Scoriated Nickel Bronze Cover and Frame with Anchor Lugs. Type of Cover as Indicated by Figure Number Selected.

VARIATIONS:

Cover Drilled in Center and Furnished with 1/4"(6)-20 x 2 1/2"(64) Long Screw

Smooth Cover -SC "T" Handle Plug -TH

Plug Tapped 1/4"(6) -20 Thread Vandal Proof Screws -U

OPTIONAL MATERIALS:

Cast Bronze Body -BB Polished Bronze Frame and Cover -PB

10-3-13 10-20-98 8-11-97 G F E

DATE

REV.

Revised Variations Revised Function Revised S.W. and/or N.H Chg'd Opt Mat **DESCRIPTION**

BW SJM TBW TBW TBW JCS ĖMB BS CKD. BY WEIGHT VOLUME POUNDS CUBIC FEFT

FIGURE NUMBER

4440, 4441