

JAY R.


SMITH MFG. CO.®

www.irsmith.con

MEMBER OF MORRIS GROUP INTERNATIONAL POST OFFICE BOX 3237 MONTGOMERY, ALABAMA 36109-0237 (USA) TEL: 334-277-8520 FAX: 334-272-7396

WATER SUPPLY CONTROL BOXES FOR FLUSHING RIM & CAN WASHING DRAINS

FUNCTION: With potable water supply protected by the integral atmospheric vacuum breaker used to supply hot, cold or tempered water to can washing drains, flushing rim drains or other devices requiring a water supply. All operating parts are protected from vandalism by means of the hinged door which is provided with a cylinder lock. Both the hot and cold water supplies are provided with integral screw driver stops allowing maintenance of the control valves without shutting down the main water supply. Fig. 3380 is furnished with plaster grounds and is usually flush mounted in plaster walls. Fig. 3385 is surface mounted and is usually used in brick or masonry construction.

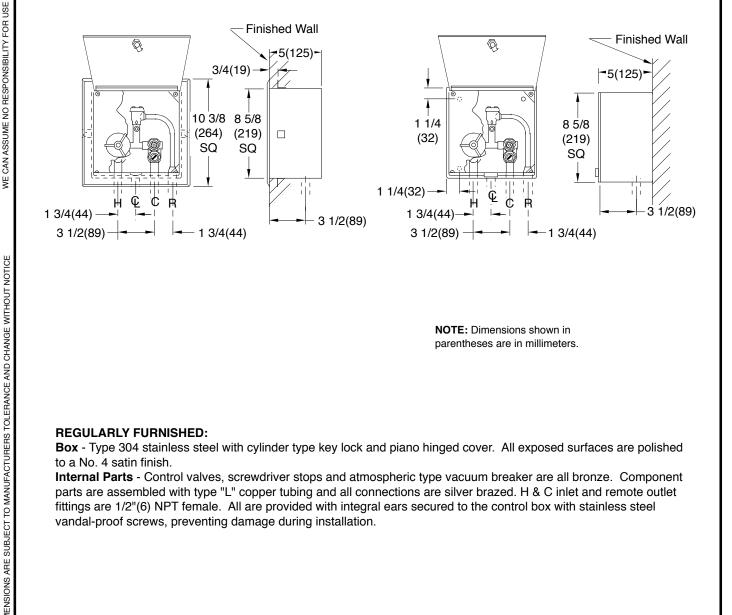

NOTE: Dimensions shown in parentheses are in millimeters.

LOCATION

REGULARLY FURNISHED:

Box - Type 304 stainless steel with cylinder type key lock and piano hinged cover. All exposed surfaces are polished to a No. 4 satin finish.

Internal Parts - Control valves, screwdriver stops and atmospheric type vacuum breaker are all bronze. Component parts are assembled with type "L" copper tubing and all connections are silver brazed. H & C inlet and remote outlet fittings are 1/2"(6) NPT female. All are provided with integral ears secured to the control box with stainless steel vandal-proof screws, preventing damage during installation.

I	C		_						
ļ							WEIGHT		FIGURE NUMBER
I	Igure Iumber	B A	8-26-96 1-3-94	Added Millimeters Submittal Update	EMB EMB	BS BS	POUNDS	CUBIC FEET	3380, 3385
FIGI	FIGI	REV.	DATE	DESCRIPTION	BY	CKD. BY			



m

S3380

SUPERSEDED OR VOID DATA

Ь

NONE

9-19-85

DRAWING NUMBEF

SIZE 4

SCAL

DA

APPROVED BY

CHECKED BY 9

DRAWN BY:

380, 3385

2

SJM