S3750

4

NONE

9-19-85

SJM

VOID DATA

SUPERSEDED OR 1

Р

USE

RESPONSIBILITY FOR

9

CAN ASSUME

NOTICE

др МТНОИТ

AND CHANGE

TOLERANCE

SUBJECT TO MANUFACTURERS

VGD

3750,3755,3760,3765

FIGURE NUMBER

DRAWING NUMBEF

MEMBER OF MORRIS GROUP INTERNATIONAL
POST OFFICE BOX 3237
MONTGOMERY, ALABAMA 36109-0237 (USA)
TEL: 334-277-8520 FAX: 334-272-7396 www.jrsmith.c




LOCATION

FUNNEL-CEPTOR® INDIRECT WASTE DRAINS

WITH ROUND TOPS

MEDIUM DUTY GRATE WITH OVAL FUNNEL

FUNCTION: Used to receive the drip, condensate or waste water from indirect waste lines. The funnel prevents splashing and directs the waste into the drain. The exposed portion of grate serves as drain for any other waste on the floor. The funnel is attached to the grate by means of concealed screws and it may be moved to any grate location desired. The oval funnel is ideal for multiple pipe use while the adjustable top permits accurate positioning of the grate, as necessary, to meet the finished floor level.

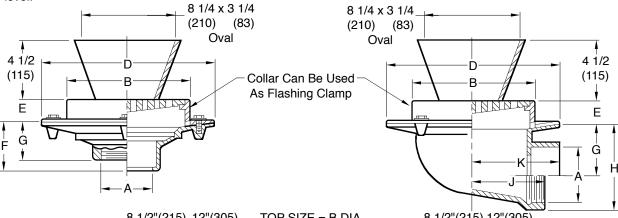

8 1/2"(215) 12"(305) . . . TOP SIZE = B DIA 8 1/2"(215) 12"(305) Fig. . . 3750C . . . 3755C CAULK OUTLET Fig. . . . 3760C . . . 3765C Fig. . . . 3750T . . . 3755T . . . THREADED OUTLET 3765T

BOTTOM OUTLET DIMENSIONS

A SIZE	B DIA	D DIA	E	F	G THD.
02(50),03(75),	8 1/2	11 1/2	2	3 3/4	2
04(100)	(215)	(290)	(51)	(95)	(51)
02(50),03(75),04(100),	12	15 1/4	2 1/2	5	3 3/4
05(125) or 06(150)	(305)	(390)	(64)	(125)	(95)

*Add 1/4" (6) when bronze top is specified.

SIDE OUTLET DIMENSIONS

A SIZE	B DIA	D DIA	E	G	Н	J	K
02(50)	8 1/2	12	2	4 1/4(110)	6	4	5 1/2
03(75)	(215)	(305)	(51)	3 3/4(95)	(150)	(100)	(140)
04(100)				3 1/4(83)			
02(50)	12	15 1/4	2 1/2	6 7/8(175)	9	6	6 3/4
03(75)	(305)	(390)	(64)	6 3/8(162)	(230)	(150)	(170)
04(100)				5 7/8(149)			
05(125)	12	15 3/4	2 1/2	5(125)	9	6 3/4	7 3/4
06(150)	(305)	(400)	(64)	4 1/2(115)	(230)	(170)	(195)

REGULARLY FURNISHED:

Duco Cast Iron Flanged Receptor with Bar Grate and Funnel.

NOTE: Dimensions shown in parentheses are in millimeters.

VARIATIONS:

L Speedi-Set Service Weight
(Available on Bottom Outlet Drains)
02(50), 03(75) & 04"(100) sizes only

_LXH Speedi-Set Extra Heavy (Available on Bottom Outlet Drains) 02(50), 03(75) & 04"(100) sizes only

Secured Grate -SG Sediment Bucket -B

6"(150) Dia. Funnel (Fig. 3581) -6 6(150) x 2 1/2(64) x 1"(25) High Oval

Funnel (Fig. 3590) Vandal Proof Secured Grate -U

Y NO-HUB Outlet (Available on Bottom Outlet Drains) NOTE: 02(50), 03(75) & 04"(100) sizes with 15 1/4(390) "D" Dim. require a transition collar (not shown in above illustration) which fits between the body and collar. Above illustration is typical for the 05(125) & 06"(150) sizes (3765 only).

OPTIONAL MATERIALS:

Chrome Plated Grate and Funnel -CP Nickel Bronze Grate and Funnel -NB Polished Bronze Grate and Funnel -PB

DCBA	11-27-95 7-22-94	Changed Millimeter Added Millimeter Submittal Update Chg'd Dim F/Fig.
REV.	DATE	DESCI

Changed Millimeters
Added Millimeters
Submittal Update
Chg'd Dim F/Fig. 3725

DESCRIPTION

CMD BS EMB BS EMB BS EMB JCS WEIGHT VOLUME POUNDS CUBIC FEET FIGURE NUMBER 3750, 3755, 3760, 3765