



R1900

VERTICAL EXPANSION JOINT

Specification: MIFAB® Series R1900 neoprene vertical expansion joint with stainless steel no hub clamps.

Function: Used to reduce the expansion and contraction movements in all types of vertical leaders, pipes, stacks and vents or soil lines in order to prevent damage to this material and to the building.

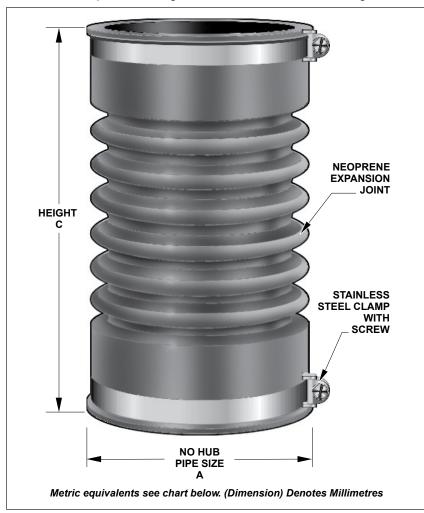



For each model, the compression is 1", expansion is 1/2" and rotation is 10 degrees.

Note: Effective temperature range is from 20°F to 122°F.

| MODEL NO. | PIPE SIZE (A) | HEIGHT (C) |
|-----------|---------------|--------------|
| R1902 | 2" (51) | 7 1/8" (178) |
| R1903 | 3" (76) | 8 1/8" (203) |
| R1904 | 4" (102) | 8 5/8" (216) |
| R1906 | 6" (152) | 8 5/8" (216) |
| R1908 | 8" (203) | 11" (279) |

SUFFIX OPTIONAL VARIATIONS
-BA Buy America Act compliant product
-PA Pennsylvania Steel Act compliant product

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

| Job Name: | Page No: |
|--------------|--------------------|
| Section No: | Contractor: |
| Schedule No: | Purchase Order No: |

MIFAB® reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880

Page R52 **2020-11-15**